



TECHNICAL SPECIFICATIONS MODEL: BPG200-32WR-072-MR200S 200 SERIES WOODRAKE GRAPPLE, BN23420

200 SERIES 3/2 WOODRAKE GRAPPLE

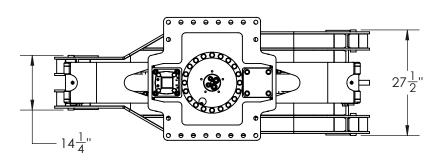

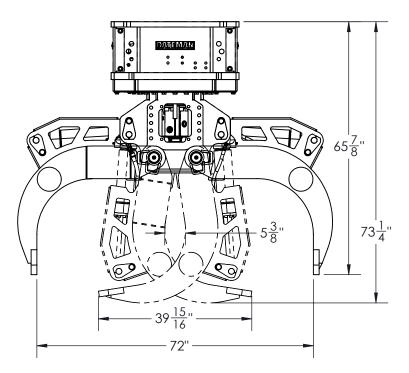

5555 GRAPPLE SAW OPTION


| Motor size | 0.61/1.16 in³ | 10/19 cc |
|-------------------|---------------|-------------|
| Required pressure | 3500 psi | 241 bar |
| Required flow | 30/42 gpm | 114/159 Lpm |
| Saw bar length | 35/39 in | 889/991 mm |
| Weight | 375 lb | 170 kg |

Open 5.0 ft² 0.46 m² Area tip to tip **Cylinder Bore** 3 1/2" 89 mm Lock valve on Cylinder Included **Cylinder Max. Pressure** 345 bar 5000 psi Weight (grapple only) 1970 lb 894 kg 2005 SERIES MANIPULATING ROTATOR Detetior Ilplimitod

72"

1829 mm

| Rotation | Unlimited | |
|------------------|-------------|-----------|
| Lifting capacity | 112,000 lb | 50802 kg |
| Max pressure | 3000 psi | 207 bar |
| Max torque | 87500 lb-in | 9886.2 Nm |
| Rotator flow | 13 gpm | 49 L/min |
| Rotation speed | 15 rpm | |
| Weight | 880 lb | 399 kg |

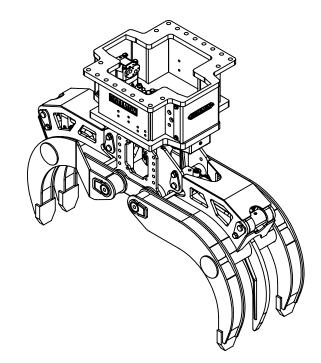

| 650S GRAPPLE SAW OP | TION | |
|---------------------|----------|-------------|
| Motor size | 2.44 in³ | 40 cc |
| Required pressure | 3100 psi | 214 bar |
| Required flow | 55 gpm | 208 Lpm |
| Saw bar length | 39/45 in | 991/1143 mm |
| Weight | 584 lb | 265 kg |

BATEMAN MANUFACTURING **5 WINSTAR ROAD ORO-MEDONTE, ONTARIO** LOL 210. CANADA

WWW.BATEMANMANUFACTURING.COM MAIL@BATEMANMANUFACTURING.COM PHONE: (705) 487-5020 FAX: (705) 487-5290



WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS AND TO IMPROVE OUR PRODUCTS WITHOUT NOTICE OR OBLIGATION ALL SCRAP AND MATERIAL HANDLING GRAPPLES DESIGNED IN ACCORDANCE WITH ASME BTH-1 DESIGN AND STRENGTH REQUIREMENTS 2021-12-23